



PVC LINE	CASING DIA.	RCP C-303	CASING DIA.	RCP C-301	CASING DIA.	DIP LINE	CASING DIA.
1"	4"	12"	20"	—	—	8"	20"
1 1/2"	6"	16"	30"	16"	30"	10"	24"
2 1/2"	6"	20"	30"	20"	36"	12"	30"
3"	6"	24"	36"	24"	42"	16"	36"
4"	8"	30"	42"	30"	48"	20"	42"
6"	12"	36"	48"	36"	54"	24"	48"
8"	16"	42"	54"	42"	60"	30"	54"
10"	18"	48"	60"	48"	66"	36"	60"
12"	20"	54"	66"	54"	72"	42"	66"
						48"	

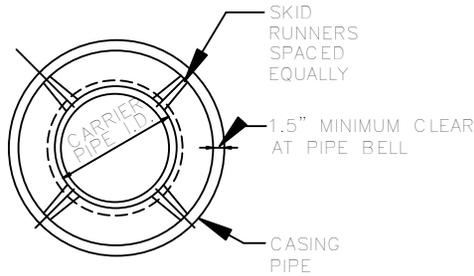

SECTION A-A

1. REFER TO PLAN & PROFILE FOR CASING SIZE & LENGTH.
2. SKID ASSEMBLIES SHALL BE THOSE MANUFACTURED BY PIPELINE SEAL AND INSULATOR, INC.; CASCADE WATER WORKS MANUFACTURING COMPANY; OR APPROVED EQUAL.
3. EACH END OF CASING SHALL BE SEALED WITH A WATER-TIGHT, REMOVABLE SEAL.
4. FOR INDIVIDUAL CARRIER PIPE SECTIONS OF TWELVE (12) FEET OR LESS IN LENGTH, A MINIMUM OF THREE (3) SKID ASSEMBLIES ARE REQUIRED.
5. ALL CARRIER PIPE SHALL HAVE MECHANICALLY RESTRAINED JOINTS.
6. BANDED WOODEN SKID ASSEMBLIES WITH SAND FILL ARE NOT ALLOWED.
7. SAND FILL IS NOT REQUIRED FOR FOR SPECIFIED SKID ASSEMBLIES.

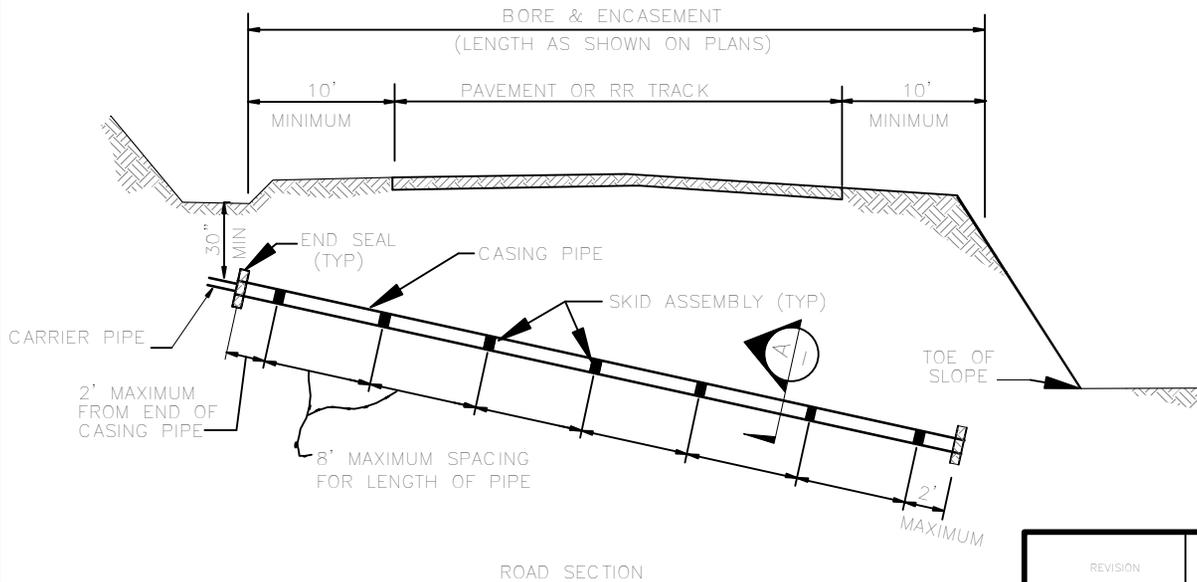

ROAD SECTION

REVISION	BY	DATE	PIPE BORE DETAIL	
			STANDARD DETAILS	
			CITY OF OWASSO, OKLAHOMA	
			PUBLIC WORKS DEPARTMENT	
			ENGINEERING DIVISION	
			DATE: 05/05	STANDARD NO. BOR-1