



REGULAR DRIVE

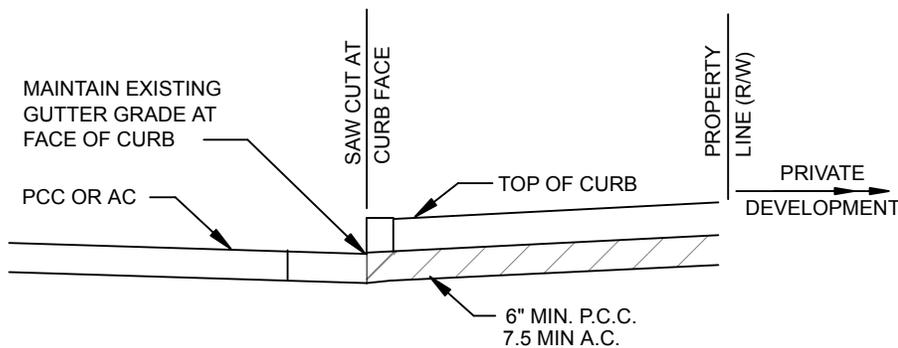

STREET/DRIVEWAY SECTION

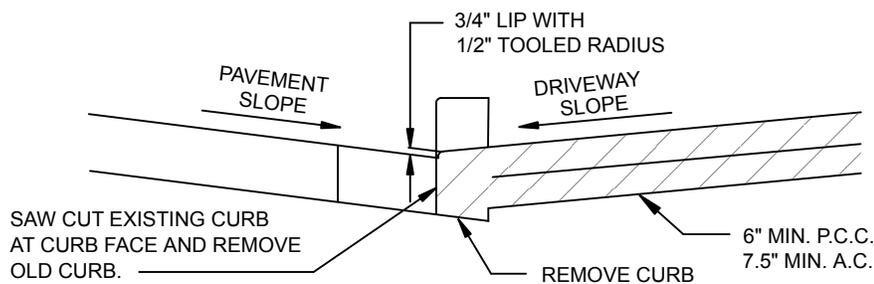

SECTION AT GUTTER

NOTE: DRIVEWAY SHALL BE DESIGNED FOR HEAVIEST RECURRING LOAD POSSIBLE.

* IF CURB CUT IS WITHIN 18" OF EXISTING CURB CONTRACTION JOINT, REMOVE EXISTING CURB TO THE CONTRACTION JOINT AND REPLACE WITH NEW CURB RETURN PLACEMENT.

REVISION	BY	DATE	COMMERCIAL DRIVEWAY STANDARD DETAILS	
			PUBLIC WORKS DEPARTMENT ENGINEERING DIVISION	
			DATE: 05/05	STANDARD NO. STRT-06