



:STANDARD DETAIL\STREET\STRT-11.DWG

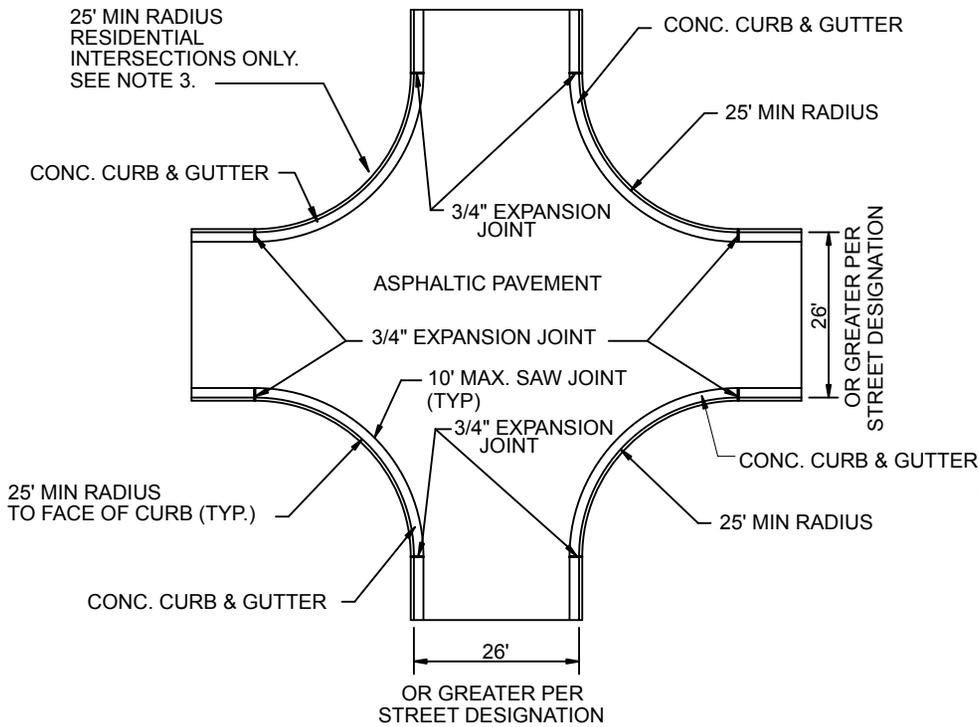

**ASPHALTIC CONCRETE**

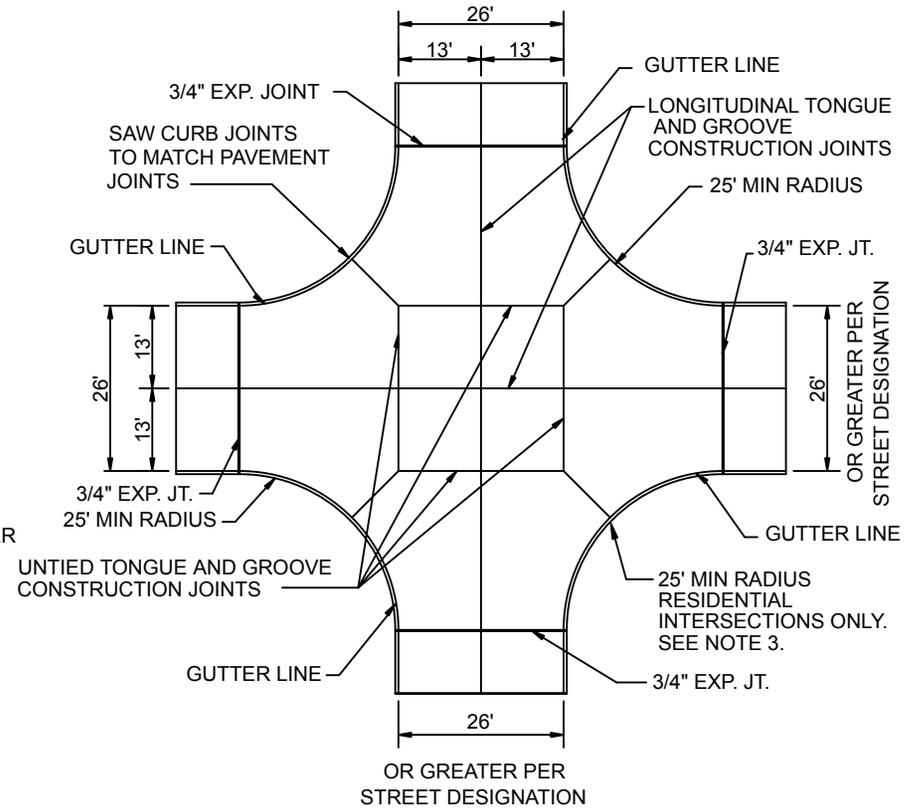

**PORTLAND CEMENT CONCRETE**

**NOTES :**

1. SIDEWALKS TO BE LOCATED PER STREET CROSS-SECTION DETAILS
2. WHEELCHAIR RAMPS PER STANDARD STRT-15 THRU 17
3. INTERSECTION WITH MAJOR STREETS OR HIGHWAYS SHALL HAVE A MINIMUM 40' CORNER RADIUS.

**NOTES :**

1. SEE STANDARD CS 2202.4 FOR SPECIFIC REQUIREMENTS FOR CONCRETE STREET, CURB AND GUTTER JOINTS.
2. DOWELS AND TIE BARS SHALL CONFORM TO AASHTO M31, GRADE 40 OR 60.
3. INTERSECTION WITH MAJOR STREETS OR HIGHWAYS SHALL HAVE A MINIMUM 40' CORNER RADIUS.

REVISION	BY	DATE	<b>STREET INTERSECTION LAYOUT</b>	
STANDARD DETAILS				
			CITY OF OWASSO, OKLAHOMA	
			PUBLIC WORKS DEPARTMENT	
			ENGINEERING DIVISION	
			DATE: 05/05	STANDARD NO. STRT-11