




TYPE "A" RAMP PLAN

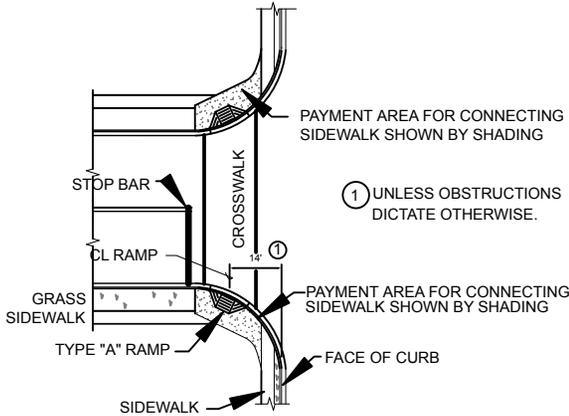


ARTERIAL STREET TYPE "A" RAMP

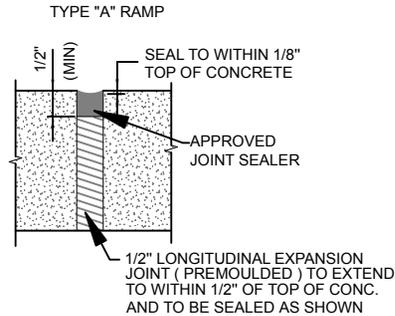

1/2" EXPANSION JOINT

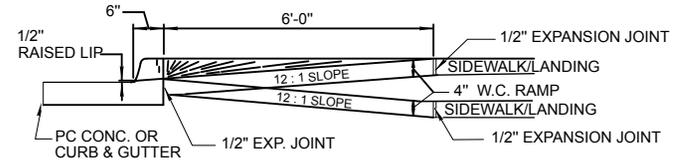

WHEELCHAIR RAMP PROFILES

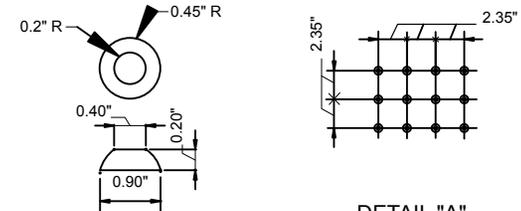

TACTILE MARKERS TRUNCATED DOMES

DETAIL "A"

TACTILE WARNING DETAILS INSTALLATION NOTES

THE TRUNCATED DOME SURFACE SHALL CONTRAST VISUALLY WITH THE ADJOINING WALKING SURFACES EITHER LIGHT-ON-DARK, OR DARK ON LIGHT. THE MATERIAL USED TO PROVIDE CONTRAST SHALL BE AN INTEGRAL PART OF THE TRUNCATED SURFACE.

RETROFIT INSTALLATIONS WILL NOT REQUIRE EXISTING DEPRESSED CURBING TO BE REPLACED. A NOMINAL 6 TO 8 INCH SETBACK FROM FACE OF CURB SHALL BE ENFORCED FOR NEAR EDGE OF TACTILE DOMES.

COST OF INSTALLATION AND MATERIALS FOR TACTILE WARNING DEVICES SHALL BE INCLUDED IN THE PRICE BID OF THE RAMPS AND SIDEWALKS.



JOINT FILLER SHALL MEET THE REQUIREMENTS OF SECTION 701.08b AND 701.08e.

JOINT FILLER SHALL BE USED BETWEEN SIDEWALK AND CURBS, WHEELCHAIR RAMPS, STREETS, RETAINING WALLS, ETC.

REVISION	BY	DATE	<b>CURB RAMP (H/C) TYPE A</b> STANDARD DETAILS	
			PUBLIC WORKS DEPARTMENT	
			ENGINEERING DIVISION	
			DATE: 05/05	STANDARD NO. STRT-16