


FILL SECTION

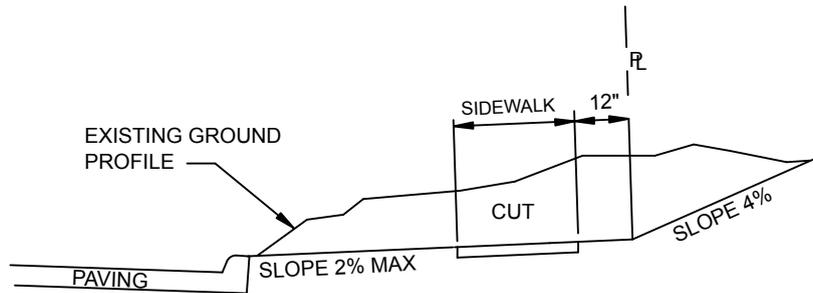

CUT SECTION

NOTES:

1. ENTIRE AREA BETWEEN CURB AND PROPERTY LINE TO BE GRADED AS SHOWN.
2. MINIMUM SIDEWALK THICKNESS 4" W/ 3" SAND BEDDING.
3. MINIMUM THICKNESS THROUGH DRIVE 6".
4. INSTALL 1/2" EXPANSION JOINT BETWEEN SIDEWALK AND CURB.

REVISION	BY	DATE	RIGHT-OF-WAY GRADING STANDARD DETAILS	
			DATE: 05/05	STANDARD NO. STRT-26