


STREET SECTION
WITHOUT CURB CUT

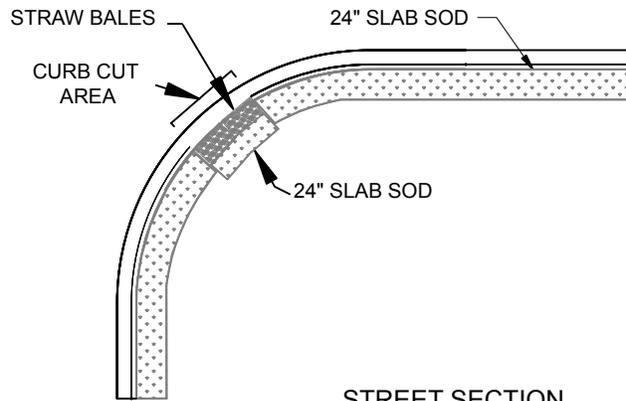

STREET SECTION
WITH CURB CUT

**EROSION CONTROL
BEHIND CURBS**

NOTES:

1. BALES SHALL BE PLACED IN A ROW WITH ENDS TIGHTLY ABUTTING THE ADJACENT BALES.
2. EACH BALE SHALL BE EMBEDDED IN THE SOIL A MINIMUM OF 4".
3. BALES SHALL BE SECURELY ANCHORED IN PLACE BY STAKES OR RE-BARS DRIVEN THROUGH THE BALES. THE FIRST STAKE IN EACH BALE SHALL BE ANGLED TOWARD THE PREVIOUSLY LAID BALE TO TO FORCE BALES TOGETHER.
4. INSPECTION SHALL BE FREQUENT AND REPAIR OR REPLACEMENT SHALL BE MADE PROMPTLY AS NEEDED.
5. BALES SHALL BE REMOVED WHEN THEY HAVE SERVED THEIR USEFULLNESS SO AS NOT TO BLOCK OR IMPEDE STORM FLOW OR BY THE OWNER.
6. THESE EROSION CONTROL DEVICES MUST BE IN ACCORDANCE WITH SECTION 400 CONSTRUCTION STANDARDS.

I:\STANDARD DETAILS\STORM\STRM-18

REVISION	BY	DATE	EROSION CONTROL BEHIND STREET CURB STANDARD DETAILS	
			DATE: 05/05	STANDARD NO. STRM-18